


# INTUITIVE *ASAFA 64*



## ASAFA 64 SPECIFICATION

Product Name	<b>INTUITIVE ASAFA 64</b>
Finish	<b>Gold</b>
Model	<b>4W</b>
Size	<b>Ø64x140mm</b>
Voltage/Hz	<b>220-240V 50/60Hz</b>
Color	<b>2000K</b>
Lumen(lm)	<b>150lm</b>
CRI	<b>CRI&gt;90</b>
IP rate	<b>IP20</b>
Beam Angle	<b>360°</b>
Protocol	<b>Bluetooth Sigmesh</b>

# Spectrum Test Report

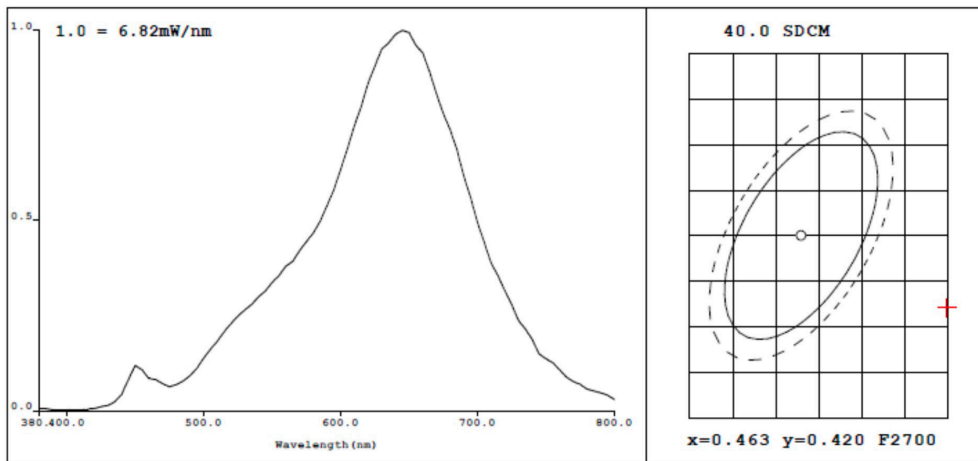

## Color Parameters:

Chromaticity Coordinate:	x= 0.5198    y= 0.4121/u'= 0.3011 v'= 0.5371
CCT	2051K (duv=-6.45e-04)
Dominant Wavelength:	Ld =588.7nm    Purity=79.7%
Color Ratio:	R=34.5%    G=64.2%    B=1.4%
Peak Wavelength:	Lp= 645nm    FWHM= 114.3nm
Render Index(CRI):	Ra=97.3    Ra'=96.3
	R1 =99   R2 =99   R3 =96   R4 =97 R5 =99   R6 =97   R7 =97   R8 =95 R9 =88   R10=99   R11=93   R12=95 R13=98   R14=96   R15=98

## Photo Parameters:

Flux	210.39 lm
Efficiency	52.63 lm/W
Fe	963.0 mW

## Electrical Parameters:

Voltage:	230.4 V
Current:	0.02698 A
Power:	3.997 W
Power Factor:	0.643

LEVEL: OUT      WHITE: OUT

Status: Interval: 5.0nm    Ip= 1546(G=6,D=53)